



Semantics & Pragmatics SoSe 2023

Lecture 12: Current Research and Applications

15/06/2023, Christian Bentz



Overview

Section 1: Information Theory

Entropic Investigations of Undeciphered Scripts
Measuring Language Complexity
Syntactic Surprisal

Section 2: Formal Semantics

First Order Logic in NLP
 λ -Calculus in NLP

References



Section 1: Information Theory



The Zipfian Challenge

*If a Martian scientist [...] received from Earth the broadcast of an extensive speech [...] what criteria would [...] determine whether the reception represented the effect of an animate process on Earth, or merely the latest thunderstorm on Earth? It seems that the only criteria would be the **arrangement of occurrences of the elements** [...]: the arrangement of the occurrences would be neither of **rigidly fixed regularity** [...] nor yet a completely **random scattering** of the same.*



Section 1:
Information
Theory

Section 2: Formal
Semantics

References

Zipf (1936). The psycho-biology of language, p. 187.




Statistical Universals vs. “Fingerprint”

Petrini, Casas-i-Munoz, Cluet-i-Martinell, Wang, Bentz & Ferrer-i-Cancho (forthcoming). The optimality of word lengths.

Semple, S., Ferrer-i-Cancho, R. & Gustison, M. L. (2022). Linguistic laws in biology.

Tanaka-Ishii, K. (2021). Statistical Universals of Language: Mathematical Chance vs. Human Choice.

Bentz, C., & Ferrer Cancho, R. (2016). Zipf’s law of abbreviation as a language universal.

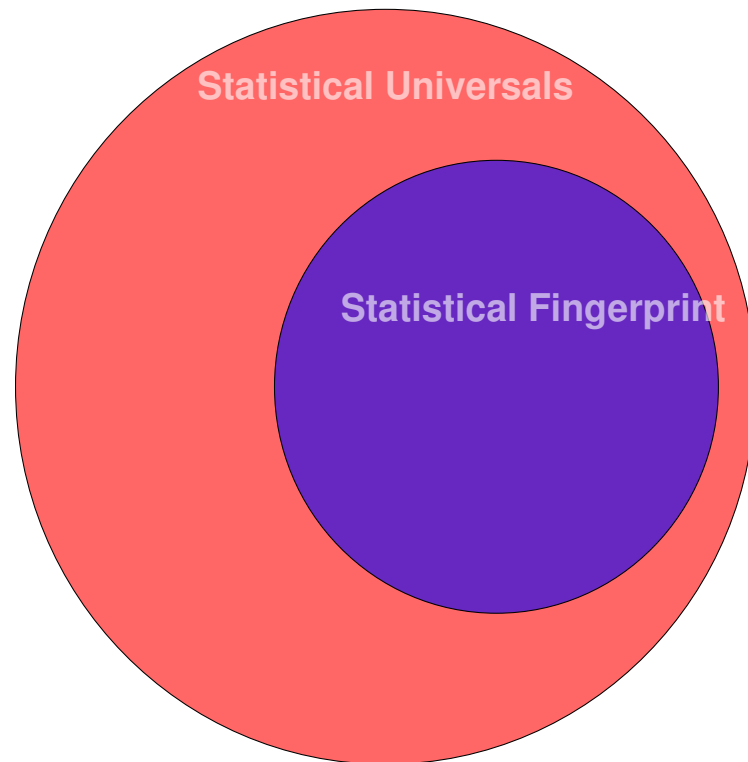

Section 1:
Information
Theory

Section 2: Formal
Semantics



References



Section 1.1: Entropic Investigations of Undeciphered Scripts



Entropic Analyses of Undeciphered Scripts

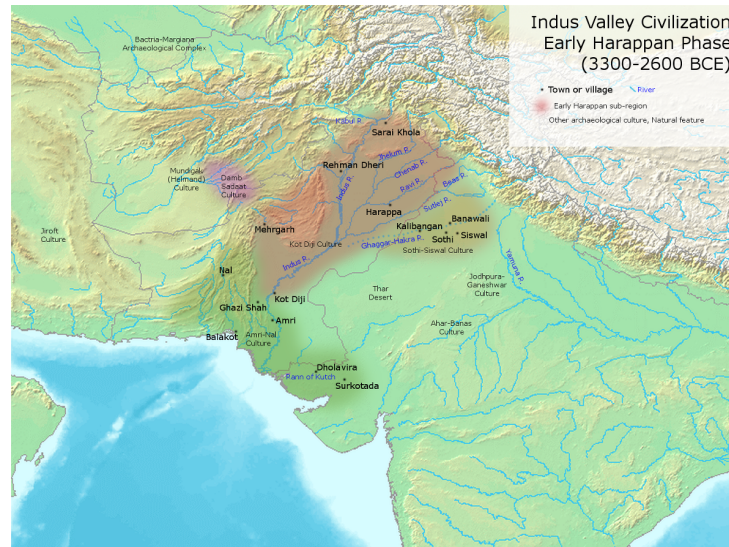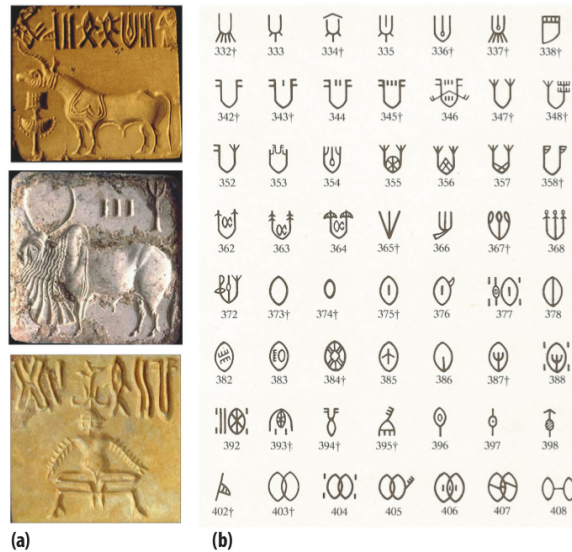

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

- Rao et al. (2009). Entropic evidence for linguistic structure in the Indus script.
 Rao (2010). Probabilistic analysis of an ancient undeciphered script.
 Rao et al. (2010). Entropy, the Indus script, and language.



Entropic Analyses: Block Entropy

“Block entropy for block size N is defined as:

$$H_N = - \sum_i p_i^{(N)} \log p_i^{(N)} \quad (1)$$

where $p_i^{(N)}$ are the probabilities of sequences (blocks) of N symbols. Thus for $N = 1$, block entropy is simply the standard unigram entropy and for $N = 2$, it is the entropy of bigrams.”

Section 1:
Information
Theory

Section 2: Formal
Semantics


References



Rao et al. (2010). Entropy, the Indus script, and language, p. 4



Written language or not?

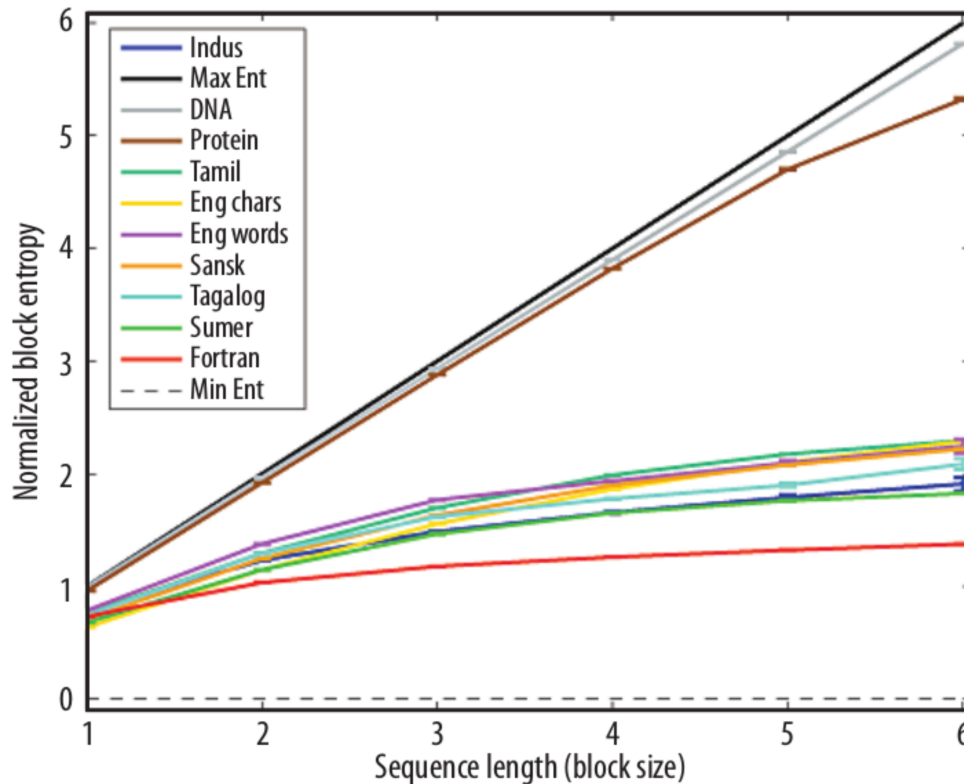

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

Rao (2010). Probabilistic analysis of an ancient undeciphered script.




However...

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

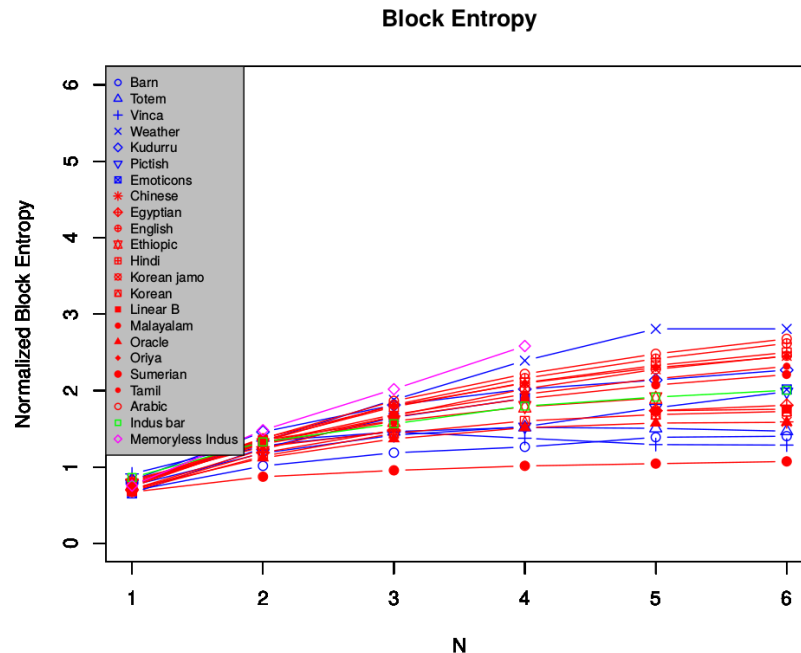


“Using a larger set of nonlinguistic and comparison linguistic corpora than were used in these and other studies, I show that none of the previously proposed methods are useful as published. However, one of the measures proposed by Lee and colleagues (2010a) (with a different cut-off value) and a novel measure based on repetition turn out to be good measures for classifying symbol systems into the two categories.”

Sproat (2014). A statistical comparison of written language and nonlinguistic symbol systems.



The Voynich Manuscript

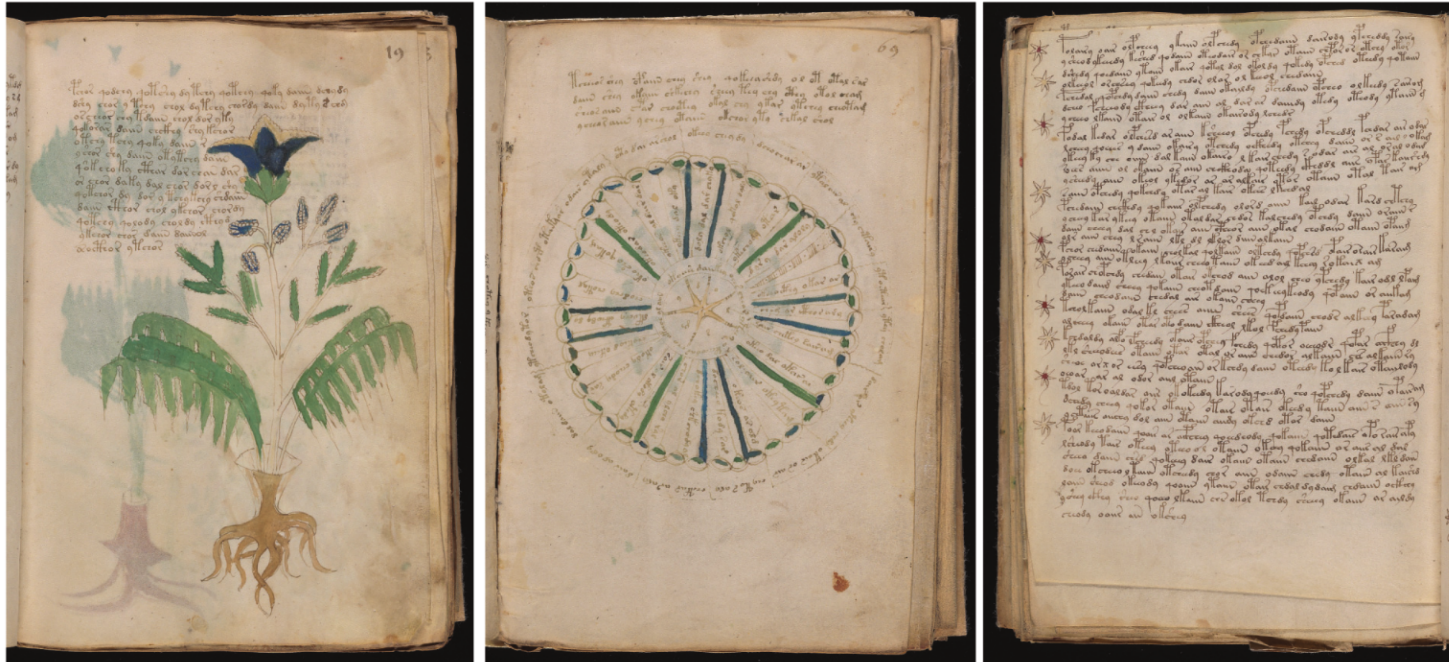

Section 1:
Information
Theory

Section 2: Formal
Semantics

References


Figure 1

Folios 19r, 69v, and 105v of the manuscript, illustrating the subject themes of herbology, alchemy, and astrology. Images courtesy of the Beinecke Rare Book and Manuscript Library, Yale University.

Bowern & Lindemann (2021). The linguistics of the Voynich manuscript.



The Voynich Manuscript

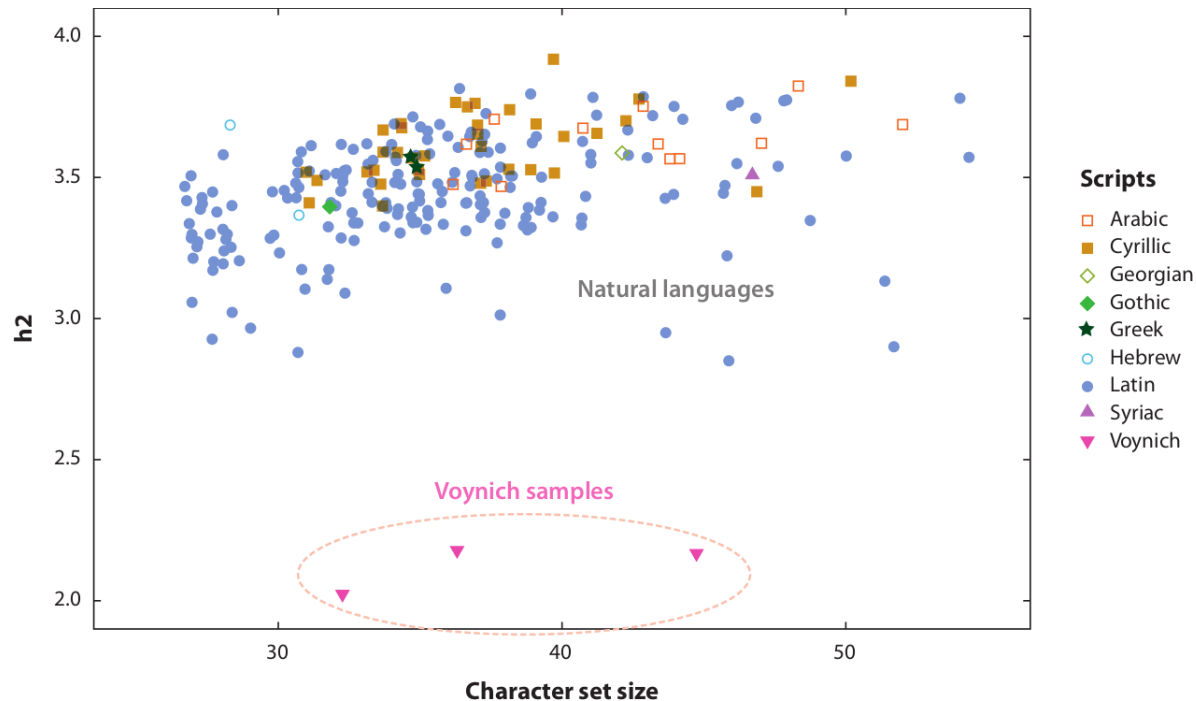

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

Figure 4

Conditional character entropy (h_2) versus number of characters for Voynichese and other languages. This chart is restricted to languages written with alphabets (Latin, Cyrillic, Gothic, Georgian) or abjads (Hebrew, Arabic, Syriac). Alphasyllabaries like Devanagari have a greater character set size but a similar h_2 . Logograms like Chinese have a much greater character set size and a much higher h_2 . All of the lowest- h_2 languages are written with alphabets.

Bowern & Lindemann (2021). The linguistics of the Voynich manuscript.



The Voynich Manuscript

Table 1 List of most common Voynich characters

Transliteration	Glyph	Transliteration	Glyph
'	ʹ	l	ℓ
a	ᵃ	m	ᵐ
c	ᶜ	n	ᵰ
d	ᵈ	o	ᵒ
e	ᵉ	p	ᵖ
f	ᶠ	q	ᵠ
g	ᵍ	r	ᵣ
h	ᵂ	s	ᵂ
i	ᵢ	t	ᵀ
k	ᵏ	v	ᵛ
x	ˣ	y	ʝ
Combined characters			
ch	ᶜʰ	sh	ˢʰ
cfh	ᶜᶠʰ	cth	ᶜᵀʰ
cph	ᶜᵖʰ	ckh	ᶜᵏʰ

Section 1:
Information
Theory


Section 2: Formal
Semantics

References

Bowern & Lindemann (2021). The linguistics of the Voynich manuscript.



The Voynich Manuscript

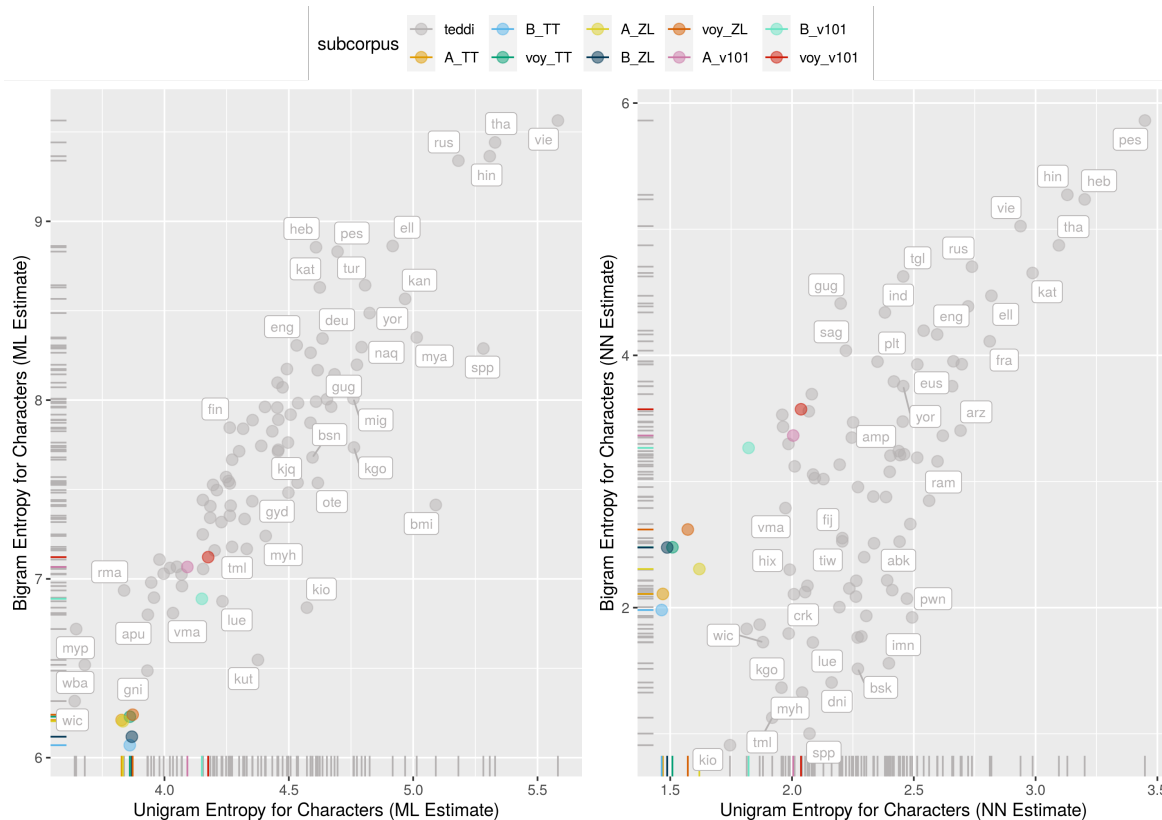

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

Lukasiewicz-Pater, Gutierrez-Vasques, and Bentz (2023). Entropic analyses of the Voynich Manuscript using a diverse cross-linguistic corpus and neural networks.



Summary

- ▶ A series of studies proposed to use **entropic measures** to distinguish human writing from other types of symbol systems.
- ▶ However, the usefulness of these measures has been called into question and needs further investigation.

Section 1:
Information
Theory

Section 2: Formal
Semantics

References



Section 1.2: Measuring Language Complexity



Measuring Morphological Complexity

Languages differ with regards to how productively they apply bound morphemes to encode information about gender, case, tense, etc. How can we measure such differences?

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

CLASS	SINGULAR				PLURAL			
	NOM	GEN	ACC	VOC	NOM	GEN	ACC	VOC
1	-os	-u	-on	-e	-i	-on	-us	-i
2	-s	-∅	-∅	-∅	-es	-on	-es	-es
3	-∅	-s	-∅	-∅	-es	-on	-es	-es
4	-∅	-s	-∅	-∅	-is	-on	-is	-is
5	-o	-u	-o	-o	-a	-on	-a	-a
6	-∅	-u	-∅	-∅	-a	-on	-a	-a
7	-os	-us	-os	-os	-i	-on	-i	-i
8	-∅	-os	-∅	-∅	-a	-on	-a	-a

TABLE 1. Modern Greek nominal inflection classes (Ralli 1994, 2002).

Ackerman & Malouf (2013). Morphological organization: The low conditional entropy conjecture.



Measuring Morphological Complexity

Languages differ with regards to how productively they apply bound morphemes to encode information about gender, case, tense, etc. How can we measure such differences?

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

	SINGULAR	PLURAL
CLASS	NOM	NOM
1	-∅	-s
2	-∅	-∅
3	-∅	-en

Table 2: Modern English nominal inflection classes for comparison. I have left out irregular nouns with ablaut (e.g. *man/men*, *foot/feet*), as well as foreign loanwords (*criterion/criteria*). Also, genitive 's is not considered an inflectional affix but rather a clitic.



Measuring Morphological Complexity


There are different perspectives we can take on measuring complexity, and these can sometimes considerably alter the results.

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

a) Distributional

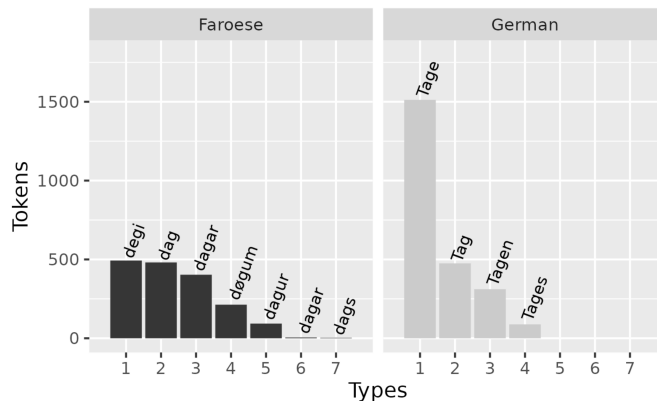

b) Paradigmatic

Singular		Plural	
Nom.	<i>dagur</i>	Nom.	<i>dagar</i>
Gen.	<i>dags</i>	Gen.	<i>daga</i>
Dat.	<i>degi</i>	Dat.	<i>døgum</i>
Acc.	<i>dag</i>	Acc.	<i>dagar</i>

Singular		Plural	
Nom.	<i>Tag</i>	Nom.	<i>Tage</i>
Gen.	<i>Tages</i>	Gen.	<i>Tage</i>
Dat.	<i>Tag</i>	Dat.	<i>Tagen</i>
Acc.	<i>Tag</i>	Acc.	<i>Tage</i>

c) Aggregated (WALS)



Bentz & Verkerk (submitted). Sociolinguistic typology: complexification and simplification.



Enumerative Complexity

“**Enumerative complexity (E-complexity)** reflects the number of morphosyntactic distinctions that languages make and the strategies employed to encode them, [...]”

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

Integrative Complexity

“The **I-complexity** of an inflectional system reflects the difficulty that a paradigmatic system poses for language users (rather than lexicographers) in information-theoretic terms.”

Ackerman & Malouf (2013). Morphological organization: The low conditional entropy conjecture.



Average Entropy (E-Complexity)

“The average entropy of a paradigm is the **uncertainty in guessing the realization for a particular cell of the paradigm of a particular lexeme** (given knowledge of the possible exponents). This gives one a measure of the complexity of a morphological system – systems with more exponents and more inflection classes will in general have higher average paradigm entropy [...]”

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

Average Conditional Entropy (I-Complexity)

[...] Thus, a better **measure of morphological complexity** is the average **conditional entropy**, the average uncertainty in guessing the realization of one randomly selected cell in the paradigm of a lexeme given the realization of one other randomly selected cell. This is the **I-complexity** of paradigm organization.”

Ackerman & Malouf (2013). Morphological organization: The low conditional entropy conjecture.



Paradigm Cell Entropy

We can calculate the entropy for every declension, i.e. paradigm cell (corresponding to columns in the table below), across the different classes and their morphological markers. This is called the **Paradigm Cell Entropy (H(c))**.

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

CLASS	SINGULAR				PLURAL			
	NOM	GEN	ACC	VOC	NOM	GEN	ACC	VOC
1	-os	-u	-on	-e	-i	-on	-us	-i
2	-s	-∅	-∅	-∅	-es	-on	-es	-es
3	-∅	-s	-∅	-∅	-es	-on	-es	-es
4	-∅	-s	-∅	-∅	-is	-on	-is	-is
5	-o	-u	-o	-o	-a	-on	-a	-a
6	-∅	-u	-∅	-∅	-a	-on	-a	-a
7	-os	-us	-os	-os	-i	-on	-i	-i
8	-∅	-os	-∅	-∅	-a	-on	-a	-a

TABLE 1. Modern Greek nominal inflection classes (Ralli 1994, 2002).



Example: Nominative Singular

The entropy is defined as:

$$H(X) = - \sum_i p(x_i) \log_2 p(x_i), \quad (2)$$

where each $p(x_i)$ is the relative frequency of each marker in the cell (i.e. maximum likelihood estimator). For instance, $p(-os) = \frac{2}{8}$ for the nominative singular cell.

The overall entropy of the nominative singular cell is thus:

$$-\left(\frac{2}{8} \times \log_2\left(\frac{2}{8}\right) + \frac{1}{8} \times \log_2\left(\frac{1}{8}\right) + \frac{4}{8} \times \log_2\left(\frac{4}{8}\right) + \frac{1}{8} \times \log_2\left(\frac{1}{8}\right)\right) = \mathbf{1.75 \text{ bits/inflexion}} \quad (3)$$

CLASS	NOM
1	-OS
2	-S
3	-∅
4	-∅
5	-O
6	-∅
7	-OS
8	-∅

Section 1:
Information
Theory

Section 2: Formal
Semantics

References



Average Paradigm Entropy (E-Complexity)

The average of Paradigm Cell Entropies across all cells (columns) is then the **Average Paradigm Entropy**.

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

CLASS	SINGULAR				PLURAL			
	NOM	GEN	ACC	VOC	NOM	GEN	ACC	VOC
1	-OS	-u	-on	-e	-i	-on	-us	-i
2	-s	-∅	-∅	-∅	-es	-on	-es	-es
3	-∅	-s	-∅	-∅	-es	-on	-es	-es
4	-∅	-s	-∅	-∅	-is	-on	-is	-is
5	-o	-u	-o	-o	-a	-on	-a	-a
6	-∅	-u	-∅	-∅	-a	-on	-a	-a
7	-OS	-US	-OS	-OS	-i	-on	-i	-i
8	-∅	-OS	-∅	-∅	-a	-on	-a	-a

TABLE 1. Modern Greek nominal inflection classes (Ralli 1994, 2002).

(8) <i>c</i>	NOM.SG	GEN.SG	ACC.SG	VOC.SG	NOM.PL	GEN.PL	ACC.PL	VOC.PL
$H(c)$	1.750	2.156	1.549	1.549	1.906	0.000	2.156	1.906
AVG								
1.621								



Average Paradigm Entropy (AVG ENTROPY) Across 10 Languages

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

LANGUAGE	CELLS	REALIZATIONS	MAX REALIZATIONS	DECL CLASSES	DECL ENTROPY	PARADIGM ENTROPY	AVG ENTROPY
Amele	3	30	14	24	4.585	1.105	2.882
Arapesh	2	41	26	26	4.700	0.630	4.071
Burmeso	12	6	2	2	1.000	0.000	1.000
Fur	12	50	10	19	4.248	0.517	2.395
Greek	8	12	5	8	3.000	0.644	1.621
Kwerba	12	9	4	4	2.000	0.428	0.864
Mazatec	6	356	94	109	6.768	0.709	4.920
Ngiti	16	7	5	10	3.322	0.484	1.937
Nuer	6	3	2	16	4.000	0.750	0.778
Russian	12	14	3	4	2.000	0.538	0.911

TABLE 3. Paradigm entropies.

Ackerman & Malouf (2013). Morphological organization: The low conditional entropy conjecture.



Example: Burmeso (bzu, Isolate, Papunesia)

The Average Paradigm Entropy of Burmeso is **relatively low**, namely, exactly **1 bit/inflection**. Note that this is because in the paradigm used (table below) there are two inflectional classes with always two different inflectional markers, so there is consistently 1 bit of choice.



Section 1:
Information
Theory

Section 2: Formal
Semantics

References

CLASS	I.SG	I.PL	II.SG	II.PL	III.SG	III.PL	IV.SG	IV.PL	V.SG	V.PL	VI.SG	VI.PL
A	j-	s-	g-	s-	g-	j-	j-	j-	j-	g-	g-	g-
B	b-	t-	n-	t-	n-	b-	b-	b-	b-	n-	n-	n-

TABLE A3. Burmeso object agreement prefixes (Donohue 2001, Baerman et al. 2010).

Ackerman & Malouf (2013). Morphological organization: The low conditional entropy conjecture.



Example: Chiquihuitlán Mazatec (maq, Otomanguean, North America)

The Average Paradigm Entropy of Chiquihuitlán Mazatec is **relatively high**, namely, **4.9 bit/inflection**.

CLASS	1SG	2SG	3	1INCL	1PL	2PL
1	a/1-1/tsi	e/2-2/nī	a/(2-2)/tsi	ā/2-2/nī	ī/2-24/nī	ū/2-2/nī
2	a/3-1/tsi	e/3-1/nī	a/(3-1)/tsi	ā/3-3 1/nī	ī/3-14/nī	ū/3-1/nī
3	æ/1-1/tsi	i/2-2/nī	i/(2-2)/tsi	ē/2-2/nī	ī/2-24/nī	ū/2-2/nī
4	u/1-1/tsi	i/2-2/nī	u/(2-2)/tsi	ū/2-2/nī	ī/2-24/nī	ū/2-2/nī
5	a/1-1/bi	e/2-2/bi	a/(2-2)/bi	ā/2-2/bi	ī/2-24/bi	ū/2-2/bi
6	a/3-1/bi	e/2-2/bi	a/(3-2)/bi	ā/2-2/bi	ī/2-24/bi	ū/2-2/bi
7	u/3-1/tsi	i/3-1/nī	u/(3-1)/tsi	ū/3-31/nī	ī/3-14/nī	ū/3-1/nī
8	æ/1-1/tsi	e/2-2/nī	e/(2-2)/tsi	ē/2-2/nī	ī/2-24/nī	ū/2-2/nī
9	o/3-1/tsi	e/2-2/nī	o/(3-2)/tsi	ō/2-2/nī	ī/2-24/nī	ū/2-2/nī
10	ē/1-43/bi	ī/1-43/bi	ē/(3-24)/bi	ē/14-42/bi	ī/14-34/bi	ū/14-3/bi
11	æ/3-1/tsi	i/3-1/nī	i/(3-1)/tsi	ē/3-3 1/nī	ī/3-14/nī	ū/3-1/nī
12	æ/1-1/tsi	e/2-2/nī	æ/(2-2)/tsi	ē/2-2/nī	ī/2-24/nī	ū/2-2/nī
13	a/1-43/tsi	e/1-43/nī	a/(3-24)/tsi	ā/14-42/nī	ī/14-34/nī	ū/14-3/nī
14	ē/1-43/tsi	ī/1-43/nī	ē/(3-24)/tsi	ē/14-42/nī	ī/14-34/nī	ū/14-3/nī
15	u/1-43/tsi	i/1-43/nī	u/(3-24)/tsi	ū/14-42/nī	ī/14-34/nī	ū/14-3/nī
16	ē/3-1/bu	ī/3-1/ēu	ē/(3-1)/bu	ē/3-3 1/ēu	ī/3-14/ēu	ū/3-1/ēu
17	æ/3-1/tsi	e/3-1/nī	æ/(3-1)/tsi	ē/3-3 1/nī	ī/3-14/nī	ū/3-1/nī
18	ū/1-1/tsi	ī/2-2/nī	ū/(2-2)/tsi	ū/2-2/nī	ī/2-24/nī	ū/2-2/nī
19	æ/3-1/bi	e/3-1/bi	e/(3-1)/bi	ē/3-3 1/bi	ī/3-14/bi	ū/3-1/bi
20	a/1-1/be	e/2-2/be	a/(2-2)/be	ā/2-2/be	ī/2-24/be	ū/2-2/be
21	u/1-43/be	i/1-43/be	u/(3-24)/be	ū/14-42/be	ī/14-34/be	ū/14-3/be
22	a/1-1/ba	e/2-2/ba	a/(2-2)/ba	ā/2-2/ba	ī/2-24/ba	ū/2-2/ba
23	a/3-1/ba	e/2-2/ba	a/(3-2)/ba	ā/2-2/ba	ī/2-24/ba	ū/2-2/ba
24	a/1-1/bu	e/2-2/ēu	a/(2-2)/bu	ā/2-2/ēu	ī/2-24/ēu	ū/2-2/ēu
25	ē/1-43/bu	ī/1-43/ēu	ē/(3-24)/bu	ē/14-42/ēu	ī/14-34/ēu	ū/14-3/ēu
26	a/3-1/hba	e/2-2/hba	a/(3-2)/hba	ā/2-2/hba	ī/2-24/hba	ū/2-2/hba
27	æ/3-1/hba	i/2-2/hba	i/(3-2)/hba	ē/2-2/hba	ī/2-24/hba	ū/2-2/hba
28	ē/1-1/tsi	ī/2-2/nī	ē/(2-2)/tsi	ē/2-2/nī	ī/2-24/nī	ū/2-2/nī
29	æ/3-1/tsi	e/2-2/nī	æ/(3-2)/tsi	ē/2-2/nī	ī/2-24/nī	ū/2-2/nī
30	ē/3-1/tsi	ī/2-2/nī	ī/(3-2)/tsi	ē/2-2/nī	ī/2-24/nī	ū/2-2/nī
31	æ/3-1/tsi	i/3-1/nī	i/(3-1)/tsi	ē/3-3 1/nī	ī/3-14/nī	ū/3-1/nī
32	æ/1-43/tsi	i/1-43/nī	i/(3-24)/tsi	ē/14-42/nī	ī/14-34/nī	ū/14-3/nī
33	æ/3-1/ba	e/3-1/ēa	a/(3-1)/ba	ā/3-3 1/ēa	ī/3-14/ēa	ū/3-1/ēa
34	a/3-1/ba	e/3-1/ēa	a/(3-1)/ba	ā/3-3 1/ēa	ī/3-14/ēa	ū/3-1/ēa
35	æ/3-1/ba	e/2-2/ēa	e/(3-2)/ba	ē/2-2/ēa	ī/2-24/ēa	ū/2-2/ēa



Section 1:
Information
Theory

Section 2: Formal
Semantics

References



Conditional Entropy

“To quantify the predictability of one form given the other, we can measure the size of the surprise associated with these forms using conditional entropy $H(Y|X)$, the uncertainty in the value of Y given that we already know the value of X .”

The conditional entropy for a cell c_1 given a cell c_2 is then defined as:

$$H(c_1|c_2) = \sum_{r_1} \sum_{r_2} P_{c_1}(r_1)P_{c_2}(r_2) \log_2 P_{c_1}(r_1|c_2 = r_2), \quad (4)$$

where “realizations” (r_1, r_2) stand in for particular inflections.

Section 1:
Information
Theory

Section 2: Formal
Semantics

References



Example: Genitive Singular and Accusative Plural

Assume we know the ACC.PL inflection is *-i*, then we know that the inflection class is 7, and hence we know that the GEN.SG has to be *-us*. Thus, we have

$$H(\text{GEN.SG}|\text{ACC.PL} = -i) = 0 \text{ bits.} \quad (5)$$

Assume, on the other hand, we know that the ACC.PL is in *-a*. Inflection classes 5, 6, and 8 are now possible. Hence, it is possible that GEN.SG is either *-u* or *-os*. According to Ackerman & Malouf (2013), p. 441 we then have

$$H(\text{GEN.SG}|\text{ACC.PL} = -a) = -\left(\frac{2}{3} \times \log_2 \frac{2}{3} + \frac{1}{3} \times \log_2 \frac{1}{3}\right) = 0.918 \text{ bits.} \quad (6)$$

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

CLASS	SINGULAR				PLURAL			
	NOM	GEN	ACC	VOC	NOM	GEN	ACC	VOC
1	-os	-u	-on	-e	-i	-on	-us	-i
2	-s	∅	∅	∅	-es	-on	-es	-es
3	∅	-s	∅	∅	-es	-on	-es	-es
4	∅	-s	∅	∅	-is	-on	-is	-is
5	-o	-u	-o	-o	-a	-on	-a	-a
6	∅	-u	∅	∅	-a	-on	-a	-a
7	-os	-us	-os	-os	-i	-on	-i	-i
8	∅	-os	∅	∅	-a	-on	-a	-a

TABLE 1. Modern Greek nominal inflection classes (Ralli 1994, 2002).



Conditional Paradigm Entropy (I-Complexity)

We can calculate all possible combinations of inflections and their conditional entropies, and then average across them to get the **Average Conditional Paradigm Entropy** ($H(P)$). This is **0.644** bits for Modern Greek (see lower right corner in table below).

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

$H(col row)$	NOM.SG	GEN.SG	ACC.SG	VOC.SG	NOM.PL	GEN.PL	ACC.PL	VOC.PL	$E[row]$
NOM.SG	—	1.000	0.250	0.250	0.750	0.000	1.000	0.750	0.571
GEN.SG	0.594	—	0.594	0.594	0.594	0.000	0.594	0.594	0.509
ACC.SG	0.451	1.201	—	0.000	0.951	0.000	0.951	0.951	0.644
VOC.SG	0.451	1.201	0.000	—	0.951	0.000	0.951	0.951	0.644
NOM.PL	0.594	0.844	0.594	0.591	—	0.000	0.250	0.000	0.411
GEN.PL	1.750	2.156	1.549	1.549	1.906	—	2.156	1.906	1.853
ACC.PL	0.594	0.594	0.344	0.344	0.000	0.000	—	0.000	0.268
VOC.PL	0.594	0.844	0.594	0.594	0.000	0.000	0.250	—	0.411
$E[col]$	0.719	1.120	0.561	0.561	0.736	0.000	0.879	0.736	0.664

TABLE 2. Conditional entropies for Modern Greek paradigms in Table 1.



Conditional Paradigm Entropy (PARADIGM ENTROPY) Across 10 Languages

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

LANGUAGE	CELLS	REALIZATIONS	MAX REALIZATIONS	DECL CLASSES	DECL ENTROPY	PARADIGM ENTROPY	AVG ENTROPY
Amele	3	30	14	24	4.585	1.105	2.882
Arapesh	2	41	26	26	4.700	0.630	4.071
Burmeso	12	6	2	2	1.000	0.000	1.000
Fur	12	50	10	19	4.248	0.517	2.395
Greek	8	12	5	8	3.000	0.644	1.621
Kwerba	12	9	4	4	2.000	0.428	0.864
Mazatec	6	356	94	109	6.768	0.709	4.920
Ngiti	16	7	5	10	3.322	0.484	1.937
Nuer	6	3	2	16	4.000	0.750	0.778
Russian	12	14	3	4	2.000	0.538	0.911

TABLE 3. Paradigm entropies.

Ackerman & Malouf (2013). Morphological organization: The low conditional entropy conjecture.



Are E-complexity and I-complexity related to Learnability?

“[...] a series of experiments [...] confirm that indeed, across a range of paradigms that vary in either e- or i-complexity, neural networks (LSTMs) are sensitive to both, but show a larger effect of e-complexity [...]. In human learners, we fail to find any effect of i-complexity at all.”

Johnson et al. (2020b). Predictive structure or paradigm size? Investigating the effects of i-complexity and e-complexity on the learnability of morphological systems.

Johnson et al. (2020a). Assessing integrative complexity as a predictor of morphological learning using neural networks and artificial language learning.


Section 1:
Information
Theory

Section 2: Formal
Semantics

References



Human Learning

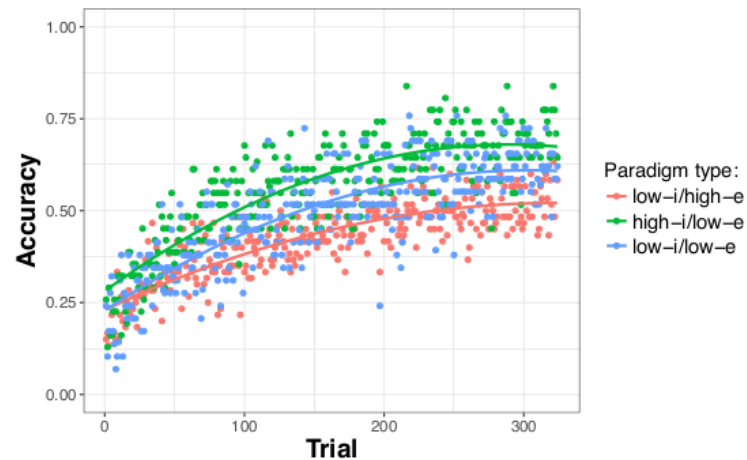

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

Figure 7. Mean accuracy by trial for each of the three paradigm types (collapsing the two low-i/high-e paradigms). Points indicate the average accuracy across participants for each trial. Lines show quadratic polynomial curves predicting accuracy by trial number for each paradigm type. Learning is worst for the low-i/high-e and best for the high-i/low-e paradigms.


Johnson et al. (2020a).

Machine Learning

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

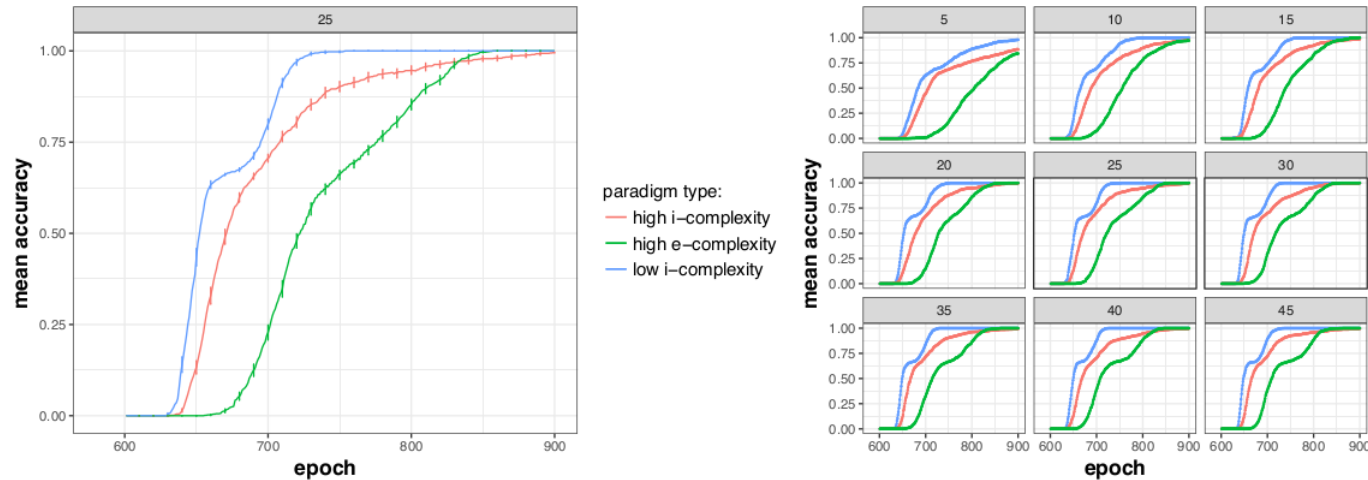

A

B

Figure 11. Average accuracy across all runs of the LSTM networks in generalizing to novel dual forms for the new high e-complexity paradigm (green) compared with results from the low i-complexity paradigm (blue) and the high i-complexity paradigm (red) from Simulation Experiment 2. A: results for one network size (25 cells), with error bars indicating standard error every 10 epochs. B: results for all the network sizes tested (facet titles give network size in number of cells). Note that the plots start at epoch 600, when the dual forms are introduced to the network (at the beginning of Block 3). In all cases accuracy for the high e-complexity paradigm is lower than for both other paradigms.

Johnson et al. (2020b).



Summary

- ▶ Ackerman & Malouf (2013) propose two entropic measures for morphological complexity: the average entropy of a paradigm as a measure of **enumerative complexity**, and the average conditional entropy of cells as an **integrative complexity** measure.
- ▶ They argue that the latter is systematically lower (low conditional entropy conjecture), and can be low even for high E-complexity languages.
- ▶ They relate I-complexity to **learnability**. However, experiments by Johnson et al. (2020a, 2020b) suggest that E-complexity is more tightly linked with learnability.

Section 1:
Information
Theory

Section 2: Formal
Semantics

References



Section 1.3: Syntactic Surprisal



Information Flow in Natural Languages

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

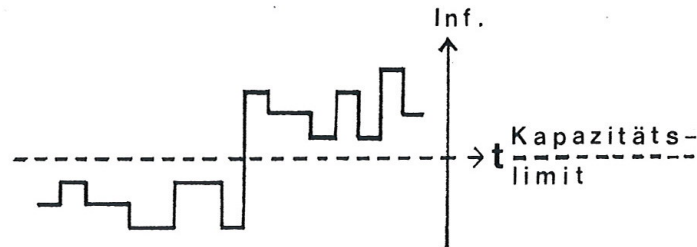


Abb. 1

Schema eines kapazitätsüberfordernden und unökonomischen Informationsflusses

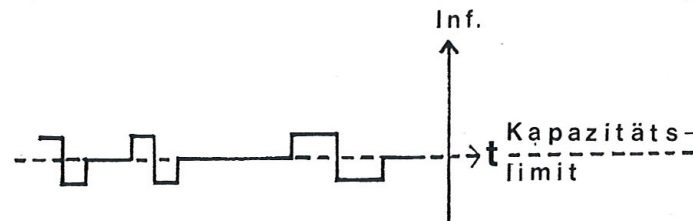


Abb. 2

Schema eines ökonomischen und der Kapazität besser angepaßten Informationsflusses

Note: “Kurzzeitgedächtnis” translates as *short-term memory*.

Fenk & Fenk (1980). Konstanz im Kurzzeitgedächtnis – Konstanz im sprachlichen Informationsfluß?



General Hypothesis

“Soll der Informationsfluß annähernd konstant bleiben, so müssen informationsarme Zeichen bzw. Wörter weniger Zeit – und daher auch weniger Silben [...] – in Anspruch nehmen als informationsreiche [...]”

Fenk & Fenk (1980). Konstanz im Kurzzeitgedächtnis – Konstanz im sprachlichen Informationsfluß?

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

Translation: In order for the information flow to be approximately constant, it is necessary that signs, i.e. words, with low information content are shorter in time – and hence use fewer syllables [...] – than the ones with high information content [...]



Average Information Content of Mono- and Polysyllabic Words

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

Berechnung des Informationsgehalts aus den relativen Häufigkeiten verschiedener Wortklassen im Deutschen

x_i	$p(x_i)$	$-\log p(x_i)$	$-p(x_i) \cdot \log p(x_i)$
1-silbig	0,5560	0,2549	0,14173
2-silbig	0,3080	0,5114	0,15752
3-silbig	0,0938	1,0277	0,0964
4-silbig	0,0335	1,4749	0,04941
5-silbig	0,0071	2,1487	0,01525
6-silbig	0,0014	2,8538	0,00399
7-silbig	0,0002	3,6989	0,00073
8-silbig	0,0001	4,0000	0,0004
			0,46543*) dit (= 1,546 bit)

Note: “1-silbig” is *monosyllabic* (e.g. *Baum* “tree”), “2-silbig” is *bisyllabic* (e.g. *On-ke* “un-cle”), etc.

Fenk & Fenk (1980). Konstanz im Kurzzeitgedächtnis – Konstanz im sprachlichen Informationsfluß?



Number of Syllables vs. Information Content

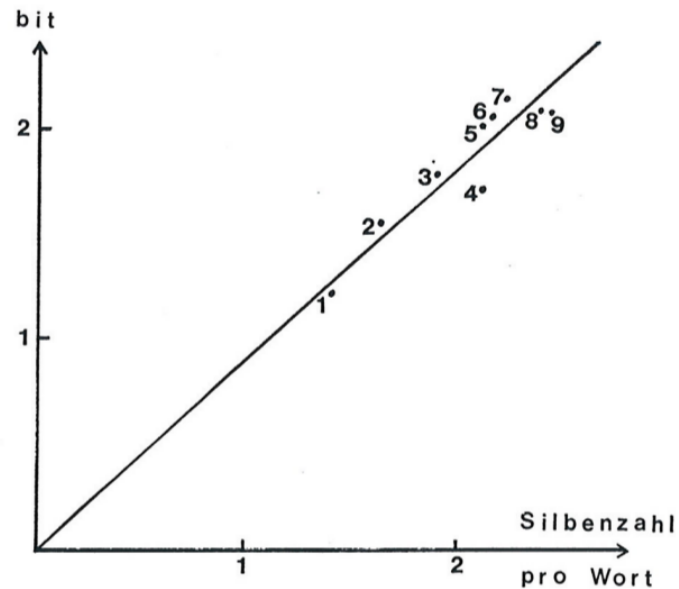


Abb. 3

Verteilung der Sprachen bezüglich mittlerer Wortinformation und mittlerer Wortlänge
(1 = Englisch, 2 = Deutsch, 3 = Esperanto, 4 = Arabisch, 5 = Griechisch, 6 = Japanisch,
7 = Russisch, 8 = Latein, 9 = Türkisch)

Note: “Silbenzahl pro Wort” represents average number of syllables per word, and the y-axis (bit) represents the average information content (i.e. entropy).

Section 1:
Information
Theory

Section 2: Formal
Semantics

References



Uniform Information Density Hypothesis (UID)

“Short-term-storage and perception mechanisms, which are involved in speech-production and speech-perception, seem to underlie some limitations, that can be defined in terms of information-theory and that should have some effects on languages in the sense of linguistic universals. The hypothesis of **very similar information flow in different languages** could be confirmed [...] in 9 languages.”

Fenk & Fenk (1980). Konstanz im Kurzzeitgedächtnis – Konstanz im sprachlichen Informationsfluß?

Section 1:
Information
Theory

Section 2: Formal
Semantics

References





Syntactic Surprisal: Psycholinguistic Models

“This report considers a definition of cognitive load in terms of [...] the surprisal of word w_i given its prefix $w_{0...i-1}$ on a phrase-structural language model. [...] Stolcke’s probabilistic Earley parser **correctly predicts processing phenomena** associated with garden path structural ambiguity [...]”

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

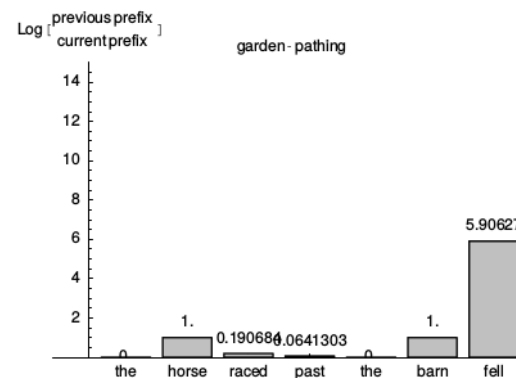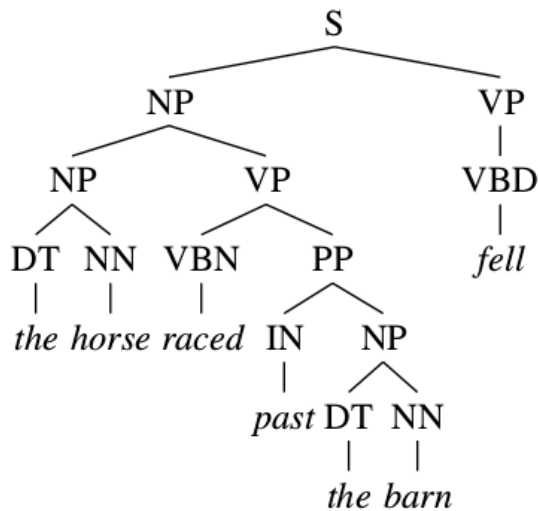

Hale (2001). A probabilistic Earley parser as a psycholinguistic model.



Syntactic Surprisal: Gender Paradigms

“These results show that, as expected, in each of the German cases, **gender markers significantly reduce nominal entropy** [...]”

Dye et al. (2017). A functional theory of gender paradigms.

Section 1:
Information
Theory


Section 2: Formal
Semantics

References

- (1) Gestern besuchte ich **den** Arzt
yesterday visited I **the.ACC.MASC** doctor
“Yesterday I visited the doctor.”

“The following noun must belong to the MASCULINE noun class, and thus nouns of all other genders are eliminated as possible candidates in this context. In short, by systematically partitioning nouns into different classes, a gender marker effectively prunes the space of subsequent possibility, delimiting the set of upcoming nouns to class-consistent possibilities.”

Figure. Noun entropy conditioned on case and number.

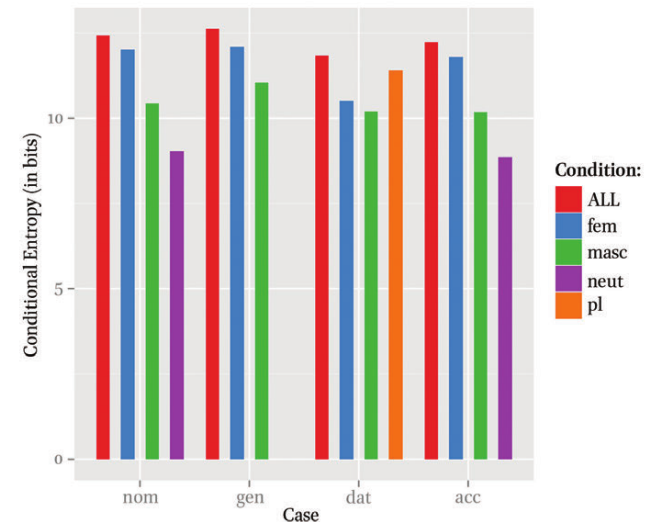



Summary

Information-theory is applied in different subdisciplines of quantitative, cognitive, and computational linguistics:

- ▶ **Statistical fingerprints:** Comparing natural languages with other symbolic and non-symbolic systems.
- ▶ **Measuring complexity** (and its relevance to learning by humans and machines).
- ▶ Psycholinguistic models and experiments about **syntactic surprisal**.

Section 1:
Information
Theory

Section 2: Formal
Semantics

References



Section 2: Formal Semantics



Section 2.1: First Order Logic in NLP



First Order Logic in NLP

“In this paper, we argue that we can combat the data hungriness of neural networks by taking advantage of domain knowledge expressed as **first-order logic**. [...]

While alignments (e.g. *author* to *writing*) can be learned from data, we argue that models can reduce their data dependence if they were guided by easily stated rules such as: Prefer aligning phrases that are marked as similar according to an external resource [...]

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

Paragraph: Gaius Julius Caesar (July 100 BC – 15 March 44 BC), Roman general, statesman, Consul and notable **author** of **Latin prose**, played a critical role in the events that led to the demise of the Roman Republic and the rise of the Roman Empire through his various military campaigns.

Question: Which Roman general is known for **writing prose**?

Li & Srikumar (2019). Augmenting neural networks with first-order logic.



First Order Logic in NLP

Predicates

$K_{i,j}$: word p_i is related to q_j in ConceptNet.

$\overleftarrow{A}_{i,j}$: unconstrained model decision that word q_j best matches to p_i .

$\overleftarrow{A}'_{i,j}$: constrained model decision that word q_j best matches to p_i .

FOL rules

$$R_1: \forall i,j \in C, K_{i,j} \rightarrow \overleftarrow{A}'_{i,j}$$

$$R_2: \forall i,j \in C, K_{i,j} \wedge \overleftarrow{A}_{i,j} \rightarrow \overleftarrow{A}'_{i,j}$$

%Train	BiDAF	+ R_1	+ R_2	+ELMo	+ELMo, R_1
10%	57.5	61.5	60.7	71.8	73.0
20%	65.7	67.2	66.6	76.9	77.7
40%	70.6	72.6	71.9	80.3	80.9
100%	75.7	77.4	77.0	83.9	84.1

Li & Srikumar (2019). Augmenting neural networks with first-order logic.

Section 1:
Information
Theory

Section 2: Formal
Semantics

References




Section 2.1: λ -Calculus in NLP



λ -Calculus in Modern NLP

“We have introduced a method for converting **dependency structures to logical forms using the lambda calculus**. A key idea of this work is the use of a single semantic type for every constituent of the dependency tree, which provides us with a robust way of compositionally deriving logical forms.”



(a) The dependency tree for *Disney acquired Pixar*.

(nsubj (dobj acquired Pixar) Disney)

(b) The s-expression for the dependency tree.

$\lambda x. \exists yz. \text{acquired}(x_e) \wedge \text{Disney}(y_a) \wedge \text{Pixar}(z_a)$
 $\wedge \text{arg}_1(x_e, y_a) \wedge \text{arg}_2(x_e, z_a)$

(c) The composed lambda-calculus expression.

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

Reddy et al. (2016). Transforming dependency structures to logical forms for semantic parsing.



Neo-Davidsonian Style of Analysis

“We use a version of the lambda calculus with three base types: individuals (**Ind**), events (**Event**), and truth values (**Bool**). Roughly speaking individuals are introduced by nouns, events are introduced by verbs, and whole sentences are functions onto truth values. [...] Verbs such as *acquired* make use of event variables such as x_e , whereas nouns such as *Disney* make use of individual variables such as y_a .”

Reddy et al. (2016)

Section 1:
Information
Theory

Section 2: Formal
Semantics

References

English words

acquired

Disney

Pixar

Neo-Davidsonian

$\lambda x.\text{acquired}(x_e)$

$\lambda y.\text{Disney}(y_a)$

$\lambda z.\text{Pixar}(z_a)$

Gamut

$\lambda x(\lambda y(\text{A}(y)(x)))$

$\lambda X(X(d))$

$\lambda X(X(p))$

Sentences

Disney acquired Pixar.

$\lambda x.\exists yz.\text{acquired}(x_e) \wedge \text{Disney}(y_a) \wedge \text{Pixar}(z_a) \wedge \text{arg}_1(x_e, y_a) \wedge \text{arg}_2(x_e, z_a)$

$\lambda x(\lambda y(\text{A}(y)(x)))(d)(p)$



Performance

“Experiments on the Free917 and Web-Questions datasets show that our representation is superior to the original dependency trees and that it outperforms a CCG-based representation on this task. Compared to prior work, we obtain the strongest result to date on Free917 and competitive results on WebQuestions.”

Reddy et al. (2016)

Note: CCG is an abbreviation for *Combinatory Categorical Grammar*. Free917 is a data set of questions and answers.

Method	Free917 Accuracy	WebQuestions Average F_1
Cai and Yates (2013)	59.0	–
Berant et al. (2013)	62.0	35.7
Kwiatkowski et al. (2013)	68.0	–
Yao and Van Durme (2014)	–	33.0
Berant and Liang (2014)	68.5	39.9
Bao et al. (2014)	–	37.5
Bordes et al. (2014)	–	39.2
Yao (2015)	–	44.3
Yih et al. (2015) (FB API)	–	48.4
Bast and Haussmann (2015)	76.4	49.4
Berant and Liang (2015)	–	49.7
Yih et al. (2015) (Y&C)	–	52.5
This Work		
DEPTREE	53.2	40.4
SIMPLEGRAPH	43.7	48.5
CCGGGRAPH (+C +E)	73.3	48.6
DEPLAMBDA (+C +E)	78.0	50.3

Table 3: Question-answering results on the WebQuestions and Free917 test sets.

Section 1:
Information
Theory

Section 2: Formal
Semantics

References



Follow-Up Study

“We introduced UDEPLAMBDA, a semantic interface for Universal Dependencies, and showed that the resulting semantic representation can be used for question-answering against a knowledge base in multiple languages.”

Reddy et al. (2017)

Method	GraphQ.	WebQ.
SEMPRE (Berant et al., 2013)	10.8	35.7
JACANA (Yao and Van Durme, 2014)	5.1	33.0
PARASEMPRE (Berant and Liang, 2014)	12.8	39.9
QA (Yao, 2015)	–	44.3
AQQU (Bast and Haussmann, 2015)	–	49.4
AGENDAIL (Berant and Liang, 2015)	–	49.7
DEPLAMBDA (Reddy et al., 2016)	–	50.3
STAGG (Yih et al., 2015)	–	48.4 (52.5)
BiLSTM (Türe and Jojic, 2016)	–	24.9 (52.2)
MCNN (Xu et al., 2016)	–	47.0 (53.3)
AGENDAIL-RANK (Yavuz et al., 2016)	–	51.6 (52.6)
UDEPLAMBDA	17.7	49.5

Table 4: F_1 -scores on the English GraphQuestions and WebQuestions test sets (results with additional task-specific resources in parentheses).

Section 1:
Information
Theory

Section 2: Formal
Semantics

References



References



References

Bowern, C. and Lindemann, L. (2021). The linguistics of the Voynich manuscript. *Annual Reviews of Linguistics*.

Dye, M., Milin, P., Futrell, R., & Ramscar, M. (2017). A functional theory of gender paradigms. In F. Kiefer, J. P. Blevins, & H. Bartos (Eds.) *Perspectives on Morphological Organization: Data and Analyses* (pp. 212-239). Brill: Leiden.

Fenk, A. & Fenk, G. (1980). Konstanz im Kurzzeitgedächtnis - Konstanz im sprachlichen Informationsfluß? In: *Zeitschrift für experimentelle und angewandte Psychologie*, Band XXVII, Heft 3, p. 400-414.

Hale, J. (2001). A probabilistic Earley parser as a psycholinguistic model. In *Proceedings of the second meeting of the North American Chapter of the Association for Computational Linguistics on Language technologies* (pp. 1-8). Association for Computational Linguistics.

Jaeger, T. F. (2010). Redundancy and reduction: Speakers manage syntactic information density. *Cognitive psychology*, 61(1), 23-62.

Johnson et al. (2020a). Assessing integrative complexity as a predictor of morphological learning using neural networks and artificial language learning. *PsyArXiv*.

Johnson et al. (2020b). Predictive structure or paradigm size? Investigating the effects of i-complexity and e-complexity on the learnability of morphological systems. *PsyArXiv*.

Section 1:
Information
Theory

Section 2: Formal
Semantics

References



Li & Srikumar (2019). Augmenting neural networks with first-order logic. *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*.

Reddy, S., Täckström, O., Collins, M., Kwiatkowski, T., Das, D., Steedman, M., & Lapata, M. (2016). Transforming dependency structures to logical forms for semantic parsing. *Transactions of the Association for Computational Linguistics*, 4, 127-140.

Reddy, S., Täckström, O., Petrov, S., Steedman, M., & Lapata, M. (2017). Universal semantic parsing. *arXiv preprint arXiv:1702.03196*.

Rao, R. P., Yadav, N., Vahia, M. N., Joglekar, H., Adhikari, R., & Mahadevan, I. (2009). Entropic evidence for linguistic structure in the Indus script. *Science*, 324(5931), 1165-1165.

Rao, R. P. (2010). Probabilistic analysis of an ancient undeciphered script. *Computer*, (4), 76-80.

Rao, R. P., Yadav, N., Vahia, M. N., Joglekar, H., Adhikari, R., & Mahadevan, I. (2010). Entropy, the Indus script, and language: A reply to R. Sproat. *Computational Linguistics*, 36(4), 795-805.

Sproat, R. (2014). A statistical comparison of written language and nonlinguistic symbol systems. *Language*, 457-481.

Section 1:
Information
Theory

Section 2: Formal
Semantics

References



Thank You.

Contact:

Faculty of Philosophy

General Linguistics

Dr. Christian Bentz

SFS Wilhelmstraße 19-23, Room 1.24

chris@christianbentz.de

Office hours:

During term: Wednesdays 10-11am

Out of term: arrange via e-mail